
## **DPA-6** Air Hydraulic Pumps

- Internal relief valve protects circuit components, air inlet filter protects motor .
- High pressure output, light weight by aluminum alloy reservoir.
- Serviceable pump motor is not a "throw away", providing economical repair.
- Permanently vented reservoir cap.
- Three-position treadle provides cylinder advance, hold and retract operation.
- Equipped with air coupler, easy for using.
- dBA 85 at 700bar for all DPA-6 pumps, lower noise.

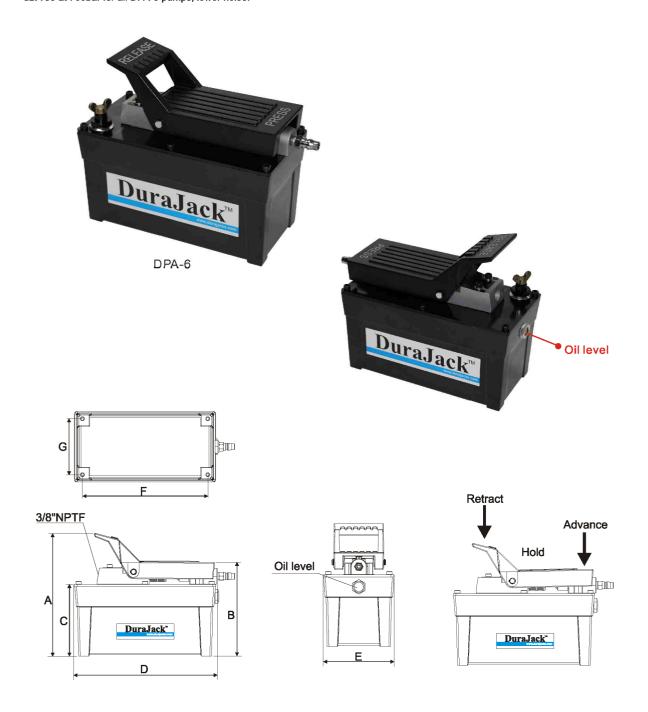

Medel	Usable	Pressure Rating		Ale	Output Flow Rate (noload)		Dimensions(mm)							VA/ 4
Model Number	Oil Capacity			Air Pressure Range			Α	В	С	D	Ш	F	Ð	W.t (Oil)
	(L)	(bar)	(psi)	(kgf/cm²)	0 bar	700bar								(kg)
DPA-6	2	700	10,000	6-10	1.24	0.16	225	171	131	260	128	228	102	8.2